


écrit en a0

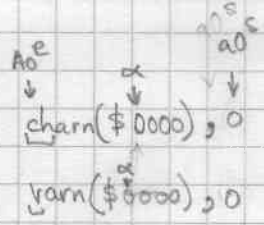

si d2^e = \$10
d2^e = 0

et met α dans (A2)+

```
WTSCMA : LEA GAS40, A1
```

```

JST D2
BNE GAS42
MOVE.B #1, (A0)+
ADDQ #2, A1

```


```

GAS42: MOVE.B (A1)+, (A0)+
BNE GAS42
SUBQ #7, A0
MOVE.L A0, (A2)+
ADDQ #6, A0
RTS

```

```
GAS40: .B "charn($0000)", 0
```

décode $fcmp$ pour sort et search

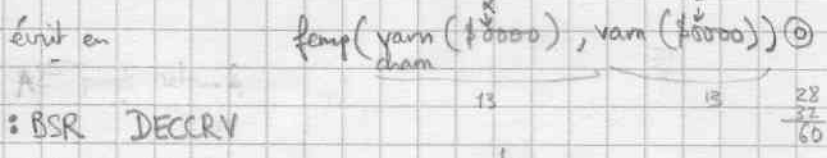


```

WTSCM: BSR DECCRV
        BNE GAS48           → rts

        BSR DECAN          decode nom
X      BEQ ERRISR          → illégal

        SUBQ #1, D0
        BNE ERRISR         → inconnu

X      LEA 24(SP), A2
X      LEA 40(SP), A0
    
```

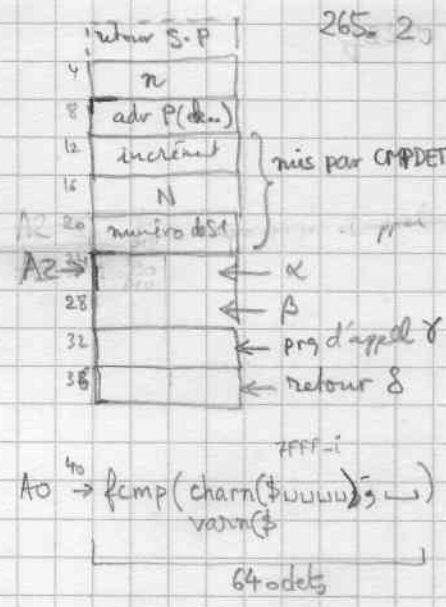

```

GAS44: MOVE.B (A1)+, (A0)+
        BNE GAS44

        MOVE.B #"( ", -1(A0)
        MOVE.L (A2), D2
    
```

{
 SUB #30, D2
 BEQ GAS46
 CMP #10, D2
 BNE ERRISR
 }

{
 \$30 var
 \$40 char
 }

```

GAS46: BSR WTSCMA
        BSR WTSCMA
        SUBQ #2, A0
        MOVE.B (A0)+, (A0)+
        MOVE.L #CMPBAS, (A2)+
    
```

varn(\$0000)
 charn(\$0000)

)) @

```

GAS48: RTS
    
```